



NW 6

RAPID CUT



PRODUCT DESCRIPTION

This is a medium cutting compound used either to remove marks and P800-P1000 sand scratches (according to the hardness of treated resins) or to restore oxidized gelcoats very fast and well, without overheating the surface. It assures an excellent gloss level, minimising the formation of holograms and minor marks.

NW 6, through its perfectly balanced components, is the ideal solution for the surface treatment of dark coloured and delicate composite parts, where the aim is a first-class finish.

PHYSICAL PROPERTIES

Colour: White
 Physical form: Creamy
 Odour: Light and pleasant
 Density: 1,490 g/ml
 Flammability: Not flammable
 Type of surface: Standard gelcoat



HOW TO USE

Mix well, then apply by variable speed polisher, selecting either an anti-scratch wool pad **SL3** for a balanced cutting-polishing action or **ST1** for a more aggressive one. Apply a small quantity of compound on the polisher-pad. Let the polisher turn at low revolutions, speeding them up (800-1500 RPM) while spreading the paste with crossed movements. Pay attention at not overheating the surface. If necessary, please repeat the application more times. Eventually, wipe it off with a clean cloth.

PRODUCT INFORMATION

Packaging	Code	Pcs/Box
1 kg	PBONW600DOEB	16
3 kg	PBONW600GOFB	4

INSTRUCTIONS FOR USE



CROSSED MOVEMENTS

RECOMMENDATIONS




MIX BEFORE USE



APPLY SMALL QUANTITY



CLOSE THE CAP




STORAGE

FOLLOWING STEPS



TOPFINISH 2

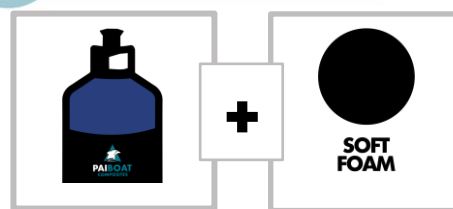

EASY GLOSS

