PROTECTION



FINISHING

POLISHING 2





PRODUCT DESCRIPTION

This is a fluid cutting polishing paste for lacquered surfaces, which can efficiently remove P1000-1500 sanding marks, as well as yellowing, oxidation and dullness. PERLA 10 has been developed to speed up the polishing process on painted boats, shortening sanding cycles and reducing polishing steps. At the same time, its balanced formula grants a high gloss level, which exceeds 90 GU. Especially on clear colours, it can be used as a "one step" compound.



PHYSICAL PROPERTIES

Colour: White Physical form: Liquid-creamy Odour: Light and pleasant Density: 1,6 g/ml Flammability: Not flammable Type of surface: Painted parts, lacquered carbon


HOW TO USE

Shake before use, then select an anti-scratch wool pad **SL3**. Pour a small quantity of compound on the polisher-pad. Let the polisher turn at low revolutions, speeding them up (800-1500 RPM) while spreading the paste with crossed movements. If necessary, wipe it off with a clean cloth. A hard white foam pad can be used for a more delicate and softer action than wool.

PRODUCT INFORMATION

| Packaging | Code | Pcs/Box |
|-----------|--------|---------|
| 1 kg | 600614 | 12 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

TECHNICAL DATA SHEET

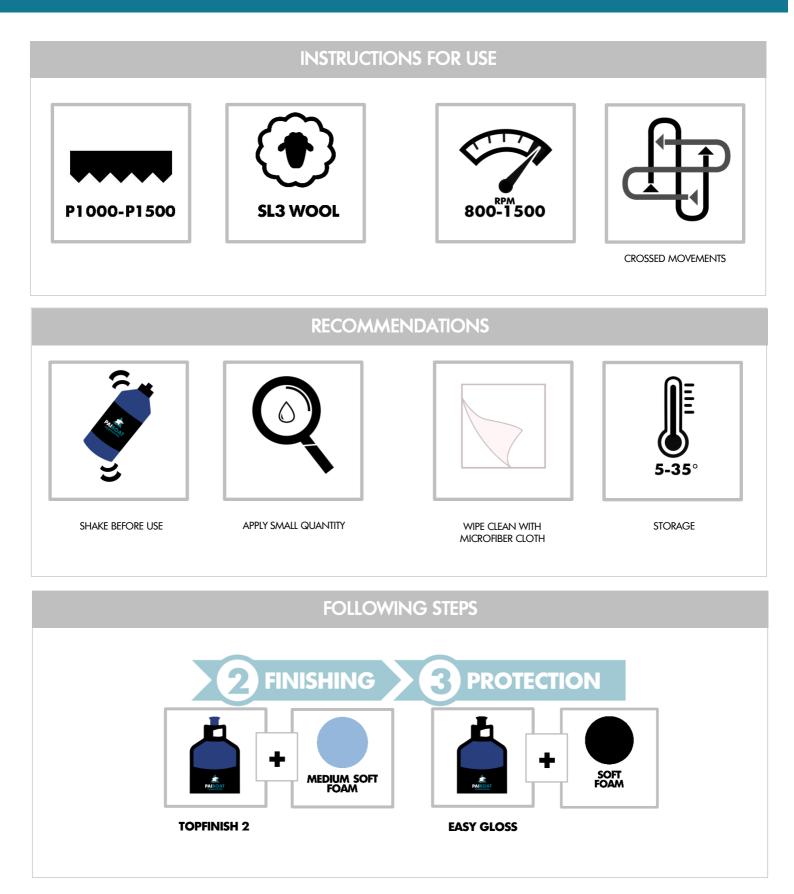



MANUFACTURED BY PAI CRISTAL ITALIA s.r.l. – Via Risorgimento, 35 – 32040 DOMEGGE DI CADORE (BL) – ITALY T. +39 0435 501668 E info@paicristal.it W. www.paicristal.it